

Spec.					
Model	ANX300i	ANX350i	ANX355i	ANX425i	ANW365i
Optical Spec.					
Brightness	3000	3500	3500	4200	3600
Display Technology	3LCD				
Contract Ratio	3000:1(with Saver mode)	3000:1(with Saver mode)	15000:1(with IRIS&ECO mode)	15000:1(with IRIS&ECO mode)	15000:1(with IRIS&ECO mode)
Resolution	XGA (1024x768)	XGA (1024x768)	XGA (1024x768)	XGA (1024x768)	WXGA (1280 x 800)
Lamp Consumption	Philips:218W				
Noise	ECO: MAX 34.9dB : Normal: 38.9dB				
Lamp Life time	5000H(Normal) /10000H(ECO)				
Aspect Ratio	4:3(Standard) / 16:9 (Compatible)				16:10(Standard) 4:3 (Compatible)
Projection Lens					
Zoom/Focus	Manual				
Throw Ratio	1.48~1.78 : 1				
F	F:2.1~2.25	F:1.6~1.76	F:1.6~1.76	F:1.6~1.76	F:1.6~1.76
f	f=19.109~22.936mm	f=19.158~23.018mm	f=19.158~23.018mm	f=19.158~23.018mm	f=19.158~23.018mm
Screen Size	0.887~10.899m(30"~300")	0.888~10.937m(30"~300")	0.888~10.937m(30"~300")	0.888~10.937m(30"~300")	0.942~11.595m(30"~300")
Generic Spec.					
Speaker	N/A		1*10W		
Scanning Frequency	Hsync Frequency 15~100KHz / Vsync Frequency 48~85Hz				
Computer Signal Input	PC, VGA, SVGA, XGA, SXGA, WXGA, UXGA, WUXGA, Mac				
Video Compatibility	PAL, SECAM, NTSC 4.43, PAL-M, PAL-N, 480i, 480p, 576i, 576p, 720p, 1080p and 1080i				
Power Consumption	270W(ECO: <0.5W)				
ECO Standby Mode	<0.5W				
Network standby	N/A		<3W		
Keystone Correction	V: ±30°(manual)		V: ±30°(auto+manual), H: ±15°(manual), Pincushion/Barrel Correction, Corner Keystone		
OSD(Languages)	26 languages: English, German, French, Italian, Spanish, Polish, Swedish, Dutch, Portugese, Japanese, Simplified Chinese, Traditional Chinese, Korea, Russian, Arabic, Turkish, Finnish, Norwegian, Danish, Indonesian, Hungarian, Czech, Kazak, Vietnamese, Thai, Farsi				
Input Terminals	VGA x1, YCbCr/ Component x1(share with VGA in1); Video x1; S-video x1(share with VGA in1); HDMI x1		Audio in (mini jack,3.5mm) x1, YCbCr/ Component x1(share with VGA in1), Video x1;Audio in(L/R)--RCaX2, S-video x1(share with VGA in1), HDMI x2(One is Compatible with MHL), USB-Ax1 (support MemeoryViewer and WiFi Dongle(Optional)), USB-Bx1(Display), RJ45x1(Display)		
Output Terminals	VGA x1		VGA x1(Share with VGA IN 2), Audio out (mini-jack,3.5mm) x1		
Other Terminals	RS-232x1, Mini USB x1(for interactive)		RS-232x1, RJ45 x1(for control), USB-Bx1(for up-grade), Mini USB x1(for interactive)		
Interactive Function Spec.					
Interactive	IR Pen Interactive				
Calibration	Manual (4 points)				
Multi-touch	5 points				
Working Projection Image	60" ~ 110"				
Display Mode	Support Ceiling mode & Desk top				
System	Windows	Windows 7 (32bit/64bit)/Windows 8/ Windows 10(Must be installed. NET Framework 4.0)			
Requiremen	Mac	Mac OS X v10.8~10.12			
Detect Fromw Rate	60 fps				
Power Consumption	200mA(Max)				
Mechanical Spec.					
Power Requirement	AC 100 - 240 V ~ 50-60 Hz				
Net. Weight(KG)	3.2 kg				
Max Dimensions(WxHxDmm)	347(W) x 257(D) x 109(H) mm				
Protobale Interactive Projector Accessories					
Standard	Power cord, VGA cable, USB-Mini cable,Light Pen(or Pointer), Remote control, Owner's Manual & Software(CD), QSG(for Projector), Installation Guide(for Interactive Function)				

*specifications subject to change without notice.

Peojection distance *All measurements are approximate and may vary from the actual sizes.

Model	Screen Size	4:3		16:9	
		Maximum	Minimum	Maximum	Minimum
ANX300i	30"	0.9m	1.1m	1.0m	1.2m
	100"	3.0m	3.6m	3.3m	4.0m
ANX350i	150"	4.5m	5.5m	5.0m	6.0m
ANX355i	200"	6.1m	7.3m	6.6m	7.9m
ANX425i	300"	9.1m	10.9m	9.9m	11.9m

Model	Screen Size	16:10		16:9	
		Maximum	Minimum	Maximum	Minimum
ANW365i	30"	0.9m	1.1m	1.0m	1.2m
	100"	3.2m	3.8m	3.3m	4.0m
	150"	4.8m	5.8m	5.0m	6.0m
	200"	6.4m	7.4m	6.6m	7.9m
	300"	9.6m	11.6m	9.9m	11.9m



Standard Throw Projector




ANX300i | ANX350i | ANX355i | ANX425i | ANW365i

AN-i Series

Brilliant and clear images with easy setup features satisfy all within your budget. Deliver interactive engaging instruction and have multiple students work together on large projected lessons

- Powerful correction function
- Latest IRIS technology
- Len Shift Function
- 3LCD color balance
- Up to 10,000 hrs lamp life time(ECO)
- Available display via USB or RJ45 cable
- Using with mobile device
- Plentiful and practical projector display modes
- Use Light Pen(or Pointer) touch projection screen

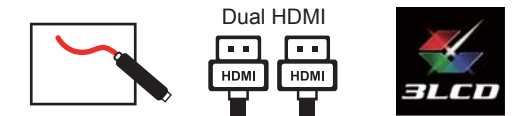

BOXLIGHT-Asia office

http://www.boxlight-asia.com
 Email: sales@boxlight-asia.com
 TEL: +886 3-6667350 / FAX: +886 3-5780432



Brightness: 3000lm ~ 4200lm.

We can provide the true brightness. While use the projector indoor, there can keep the light on and have the vivid color performance.




3LCD let the color performance more balance.

Used with 3LCD technology, output vivid color performance, exquisite picture quality with different brightness to show a clear, bright, natural images to you during the business presentation. Provide the users a particularly prominent experience.




10,000 hours lamp life time, allowing the customer user-friendly feeling.

Up to 10,000 hours life time(ECO mode), it can tremendously reduce the supplies and save the cost.

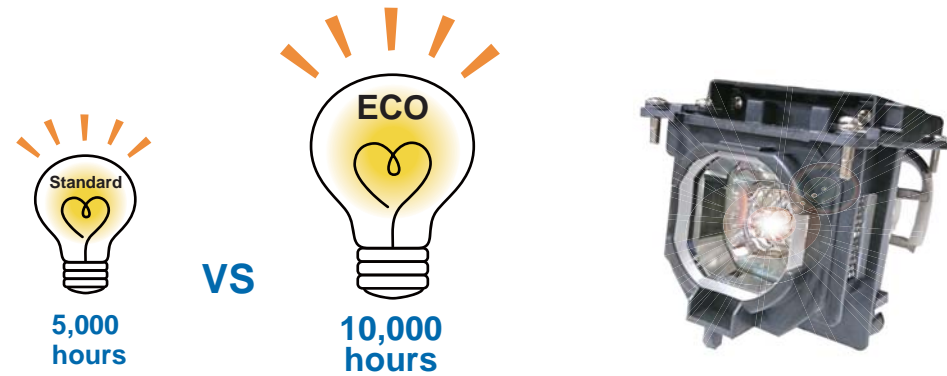

Powerful correction function.

Having the convenient manual and automatic Vertical correction, and manual Horizontal correction function. Moreover, user can use Corner Keystone, Pincushion/Barrel Correction* to adjust the projected picture. Ensure user can project in any uneven surface. *ANWU405 doesn't support this function. / ANX300 and ANX350 support Vertical only.

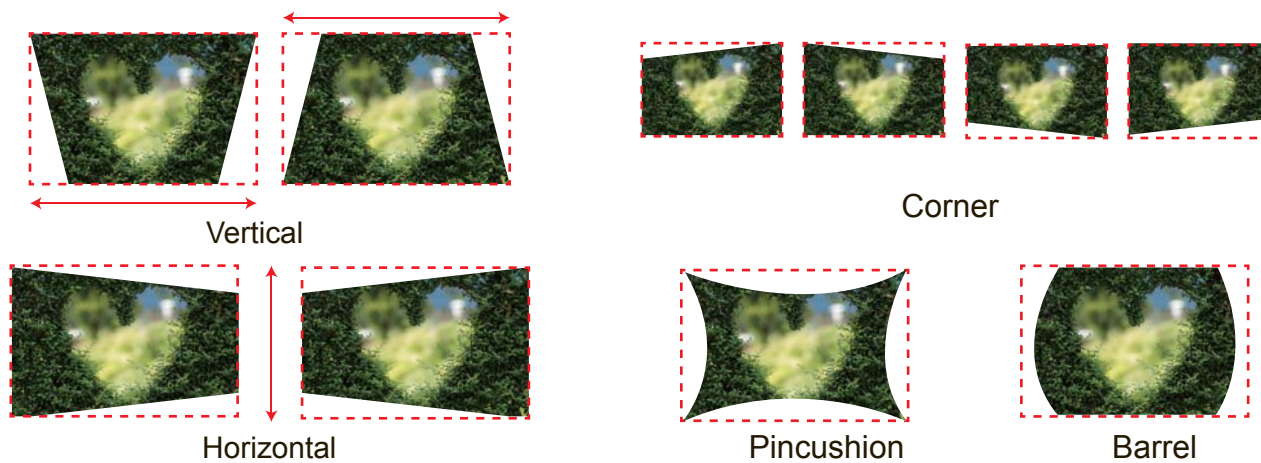

Plentiful interface, more expanded display interface: RJ45 & USB. *ANX300i & ANX350i doesn't support this function.


Not only the mainstream interface but also LAN & USB terminals can project any kind of signals. USB slot can support data reading such as jpeg or pdf*.

* USB-A slot has limit with files, please make sure that the file can be read or not before use.



Contrast: The latest IRIS increase the contrast.

Using the latest dynamic IRIS contrast enhancement technology, greatly enhance the contrast of picture. Compared to traditional LCD projectors it can provide the highest 3000:1 / 15000: 1 contrast ratio, the perfect purest black in the presentation, and the clear picture, structured and subtle image to bring superior visual impact.

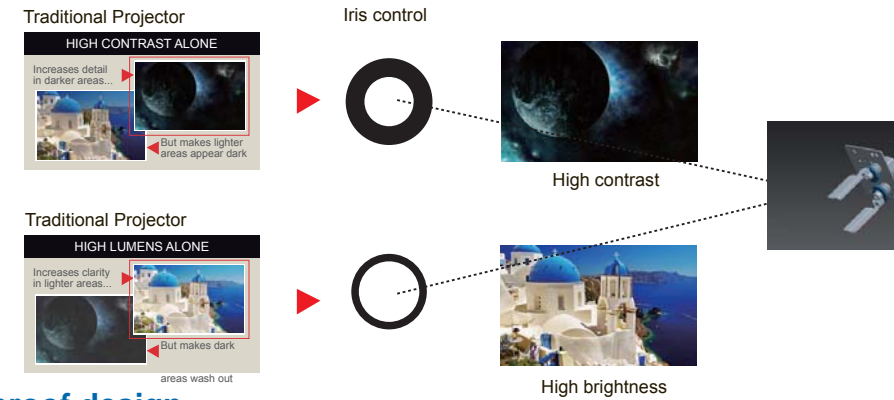


Rigid dustproof design.

High efficiency HEPA electrostatic dust filter can effectively extend the projector life to ensure the image quality. Projector built-in auto-detected system, always checks the projector's air volume, and automatically detects whether the filter is blocked. It can actively give the alarm to clean up the filter message to protect the machine and improve the service life.



Interactive Function: Make easy to use projector.

Connect to PC. It can install the software to Windows or Mac. You can use the Light Pen like the mouse to control your PC. The LightPen software provide useful toolbar, such as Ren pen, Drawing tool- to draw shape, Eraser- clean the mark, Save file- capture the current screen, White Board- chang other desktop. For more toolbar function please refer to the user's manual.

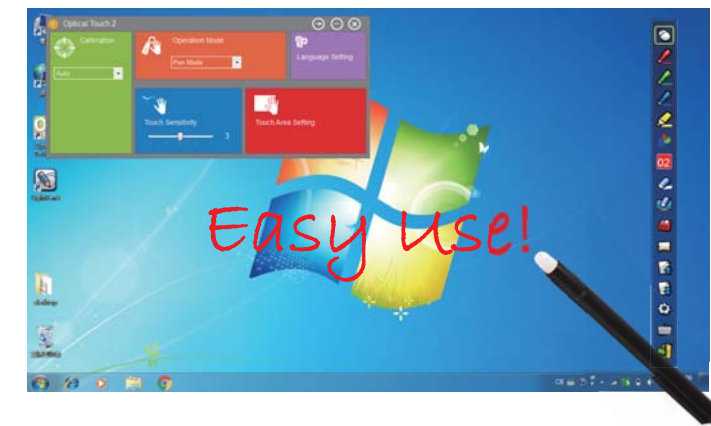

Wireless projection.

*Optional function.
**ANX300i doesn't support this function.

Using optional wifi reveier, you can use the wireless projection function in Windows OS. Without HDMI cable, VGA cable or RJ45 cable. You can more easy to projection the data that you need anywhere.

