


MimioBoard 78W / 87W touch board

Enhance classroom collaboration with an interactive touch board that's also a conventional dry erase board. Up to ten single-point touch users or five dual-touch and gestures users can work simultaneously at this easy-to-install board.

Enjoy touch technology designed for real classrooms with an interactive board that offers collaborative learning and an unprecedented touch experience. With Touch 360° interactivity, up to ten students can work together simultaneously at this easy-to-install interactive whiteboard. Their control and touch experience will be fast and precise no matter where they are working on the board.

- Part of a complete interactive solution that includes MimioStudio™ classroom software, which allows you to create lessons and collaborative activities, as well as perform formative assessment.
- Up to ten single-point users or five dual-touch and gestures users can work together interactively at the same time with the class, increasing student engagement and driving collaborative learning.
- Erasable surface allows teachers to use the classroom-rugged touch board for their normal whiteboard activities.
- The lightweight touch board typically installs in less than 10 minutes with included mounting brackets.
- Lessons come to life on this projection-optimized nano-coated surface.



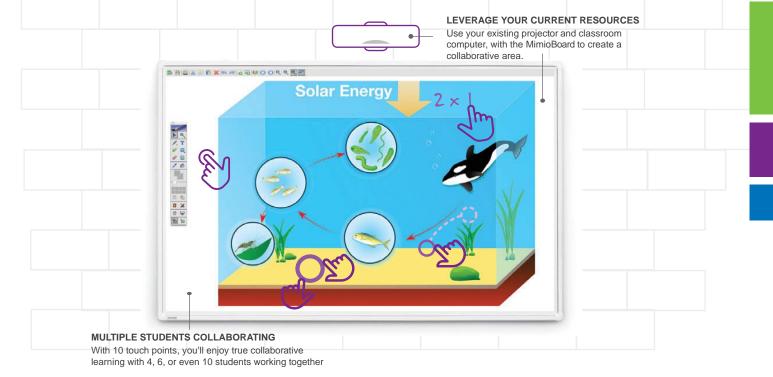

Specifications

Specifications		
Model	MimioBoard 78W	MimioBoard 87W
Operation System	Windows 7 and Windows 8: Includes multi-touch and gestures. Mac OS and Linux: Single point	
Overall Dimensions	1,680 mm L x 1,050 mm H x 38 mm D	1,880 mm L x 1,172 mm H x 38 mm D
Diagonal Board	1,981.2 mm (78 in.)	2,209.8 mm (87 in.)
Weight	13.6 kg (29.9 lb)	18.6 kg (35.9 lb)
Shipping Dimensions	1,846 mm L x 1,216 mm H x 80 mm D	2,046 mm L x 1,341 mm H x 80 mm D
Shipping Weight	15.8 kg	19.8 kg
Aspect Ratio	16:10	
Tracking Technology	Touch 360°	
Touch Point	10	
Touch Tool	Stylus, finger, solid object	
Styll	Ergonomically elegant passive styli are weighted and balanced for interactive use	
Tracking Read Speed	>100 frames/s	
Tracking Response Time	10 ms	
Minimal Object Size	3 mm (.12 in) x 3 mm (.12 in)	
Frame Finish	Rigid extruded aluminum frame with high-gloss, powder-coated finish	
Surface	Durable, magnetic, and erasable nano-coated surface	
Wall Mount Brackets	Four-position interlocking wall-mounting fixture	
Operation Temperature	-10° to 50° C	
Storage Temperature	-20° to 60° C	
Humidity	Up to 90% RH from 0°C to 40°C, non-condensing	
Power Consumption	3 W	
Input/Out Description	USB Type-A Female	
Data Transfer Rate(USB)	Full-speed USB (up to 12 Mbps)	
International Use	Computer USB is the power source, enabling "start up and go" in any country	
	1680 mm (66.14 in.)	1880 mm (74.02 in.)
Drawing	060 Hilli (66.14 III.) (i) 17 18 18 18 18 18 18 18 18 18	1172 mm (46.14 in.)
	, ,	Depth = 38 mm (1.5 in.)

*specifications subject to change without notice.



